3Brynawel Farm
Brynbach Road
Pontlliw
Swansea
SA4 9HD

T:01792 001 345
07772845259
E: david.lannaghan@harlestonefencing.co.uk

Quotation

To	Parish Clerk
Client	Lyneham & Bradenstoke Parish Council
QT	80007
Date	7th July 2025
HF Contact	Silas Wilde

Brief Project Description
The Parish Council is in the process of negotiating with landowners to purchase an additional piece of land adjacent to the existing playing field. Harlestone Fencing has been approached to provide budget prices to secure the perimeter and upgrade the existing playing field with a more aesthetically pleasing playground fence.

Contact information

Client contact name
Elizabeth Martin

Address
72 The Green
Poulshot
Swindon
SN10 1RT
ENGLAND

Client Contact
E: Parish.clerk@lynehamandbradenstoke-pc.gov.uk

Contractor Contact
E: silas.wilde@harlestonefencing.co.uk
M: 07546 714151

Project Brief

Approach

Harlestone Fencing specialises in all types of commercial fencing and supporting groundwork. We have reviewed the scope of your work and carried out a site visit to assess topography and access onto the site. We have contacted relevant manufacturers who supply playground fence systemsto ensure we are able to offer you the best solutions. The project itself does not fall under strict main contractor CDM regulations, however given its remote location to welfare facilities we intend to set the site up using CDM guidelines e.g. a small secure Heras site compound will be erected and a mobile welfare unit installed so operatives have access to clean water and sanitation thus protecting them and your environment.

On site observations

The fence to the existing playing field fence is 1.8m (6ft) galvanised steel palisade, whilst it is in good condition, in today's world it looks a little prison like therefore we recommend it should bo be removed and set aside (we would recommend it is sold on Ebay)

The new area of the land is reasonably flat; there is a lot of overgrowth at present which would need to be removed from the immediate fence line but all achievable. The proposed new fence would border neighbouring properties so permission from the council would need to be sought however the recommendation would be to erect the new fence inside these boundaries leaving the Neighbours fencing intact.

Specification and recommendation

We would recommend a Rigid mesh system 1.8m high galvanised with a PPC colour finish either Moss Green RAL 6005 or Black RAL9005. There are many mesh types of mesh available to you but we recommend you avoid the entry level mesh type as this is quite flimsy, we also don't think your application requires the top security fence there we recommend an 868 mesh system which is rigid and robust allowing kids and footballs to play with damaging the mesh. See photo below

Harlestone
FENCING

Images

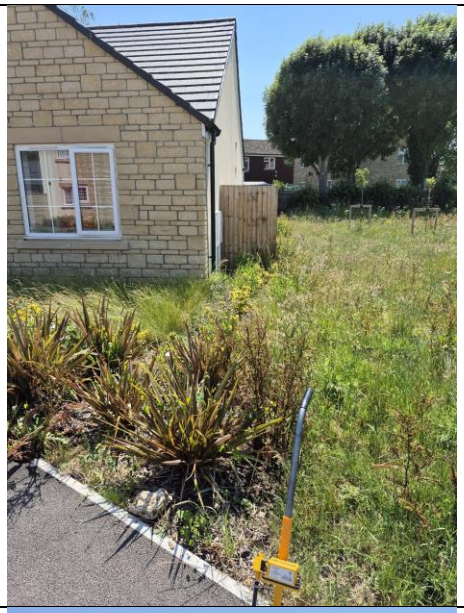
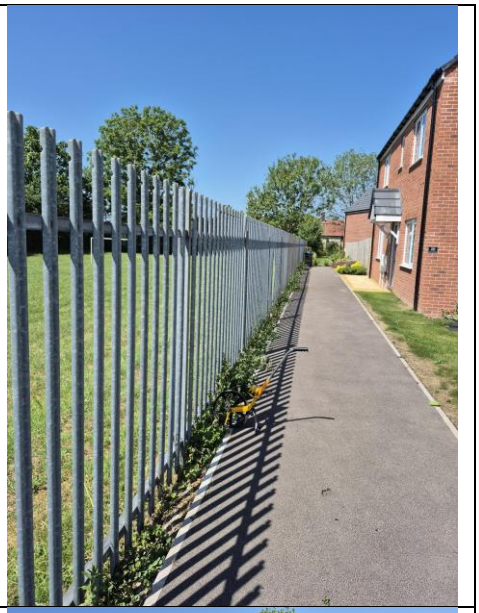

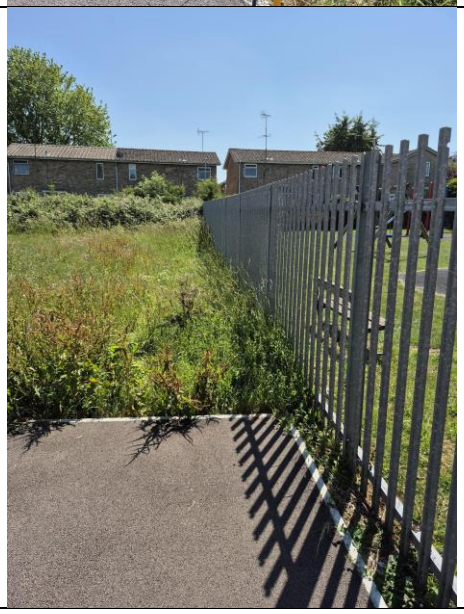

Harlestone FENCING

Quotation

QT 80007 - Lyneham Proposed New Playing Field Fencing

	Work Description	Quantity Measure	Unit	Rate	Revised Total
	Take down				
1.0	Take down existing galvanised Palisade and set aside for re-sale	80	M	£9.95	£796.00
1.1	Remove existing shrubbery off site	50	M	£25.00	£1,250.00
				Sub - Total	**£2,046.00**
	Main Perimeter - Rigid Mesh fence				
2.0	Supply and erect new 1.8m 868 Mesh fence on RHS Posts	190	m	£88.50	£16,815.00
2.1	Supply and install 2.4m high Corners & 2/way strainers	4	No	£120.00	£480.00
2.2	Supply and install End Strainers	3	No	£90.00	£270.00
				Sub - Total	**£17,565.00**
	Gates to suit 1.8m high 868 fence				
3.0	Supply and install pedestrian gate 1.8m H x 1.2m W	2	No	£1,725.00	£3,450.00
3.1	Supply and install 1.8m H x 3.6m W vehicle access gate	1	No	£2,065.00	£2,065.00
				Sub - Total	**£5,515.00**
	General Items				
4.0	Welfare set up and hire for contract	3	week	£387.50	£1,162.50
4.1	Heras Fencing (50m allowance to protect works & site compound areas)	3	week	£275.00	£825.00
4.2	Mini Excavator with selection of Buckets	3	week	£225.00	£675.00
4.3	ECAT4+ & Genny4 (cable scanners)	3	week	£52.00	£156.00
4.4	Skip hire	2	item	£450.00	£900.00
				Sub-total	**£3,718.50**
		Contract Total		**£28,844.50**	

Harlestone
FENCING

General information

Duration
Works will take between 2-3 weeks to complete
A program of works will be produced and supplied prior to commencement of works.

Lead in period
2-3 weeks from receipt of written notice – (gates 4 weeks)

Terms & Conditions
Company details already provided. Copies of Insurance will be provided on request
RAMS & Certs will be forwarded prior to commencing work.
Payment payable on satisfactory completion
Price subject to Vat
Price fixed for 4 weeks

Warranties

- We offer a 12-month workmanship defects liability period
- Materials come with a 10-year manufactures warranty*

Manufacturer's warranty T&C's apply

Additional Notes

- Specification to be approved by client prior to order.
- The Parish Council is responsible for any necessary planning permissions.
- Samples will be provided on receipt of instruction, although for the purposes of evaluation we would request you to review the product data sheets provided.
- All permits to dig will be produced and attached to the safe start and sent on HF tablets - no work to commence until safe start is completed and signed off by HF Supervisor or Contracts Manager
- Uprisings will be spread along the works area
- Area will be CAT Scanned prior to works starting and during the excavation process
- Signage excluded
- Contact and introductions to the Neighbours land to be provided by the council

References

- Reference A. We are currently a preferred framework fencing contractor for the whole of Welsh Water assets throughout Wales and West of UK. Contact: Jason Sanders email jason.sanders@dwrcymru.com

- Reference B.
  CDS Integrated Security Systems – Lloyd Owens l.owens@cdssystems.co.uk

- Reference C
  Harlestone Fencing website www.harlestonefencing.co.uk

- Reference D
  Harlestone Fencing are members of Construction Line and CHAS Elite